

These are PLANS FOR EXPEDIENT FALLOUT SHELTERS



SAVE THESE PLANS—THEY MAY SAVE YOUR LIFE

● GENERAL INFORMATION

WITHOUT PROTECTION, UNTOLD NUMBERS OF AMERICANS WOULD DIE NEEDLESSLY IN THE EVENT OF A NUCLEAR ATTACK. THE EXPEDIENT SHELTERS ILLUSTRATED IN THE FOLLOWING PAGES PROVIDE PROTECTION TO OCCUPANTS FROM THE DEADLY RADIATION OF RADIOACTIVE FALLOUT GENERATED BY A NUCLEAR DETONATION — THEIR USE CAN SAVE THE LIVES OF MILLIONS OF AMERICANS.

EVEN THOUGH THE ILLUSTRATED SHELTERS ARE VERY AUSTERE, THERE ARE A NUMBER OF THINGS THAT CAN BE DONE TO IMPROVE THEIR HABITABILITY AFTER THEY HAVE BEEN BUILT. WITH THE USE OF A LITTLE INGENUITY AND EFFORT, THE SHELTERS CAN BE MADE MORE COMFORTABLE. SOME OF THE THINGS THAT CAN BE DONE ARE:

- CONSTRUCT SEATS, HAMMOCKS, OR BUNKS.
- COVER THE FLOOR WITH BOARDS, PINE BOUGHS OR LOGS AND DRAPE SHEETS OR MATERIAL OVER THE EARTH WALLS.
- PROVIDE SAFE, DEPENDABLE LIGHT.
- FOR HOT WEATHER, CONSTRUCT THE EXPEDIENT AIR VENTILATION PUMP.
- FOR COOKING, CONSTRUCT THE EXPEDIENT COOK STOVE FOR USE IN THE ENTRYWAY. IN COLD WEATHER, SEAL THE ENTRANCE AND USE THE STOVE FOR HEATING THE SHELTER AREA. BE SURE VENTILATION IS PROVIDED WHENEVER THE STOVE IS USED.
- STORE SHELTER SUPPLIES IN ENTRYWAY FOR MORE LIVING SPACE. COVER ALL OPEN CONTAINERS. RADIATION WILL NOT DAMAGE THESE SUPPLIES.

HUMANS MUST HAVE WATER AND FOOD TO LIVE. WHEN PEOPLE ARE TO LIVE IN A SHELTER FOR A WEEK OR TWO, SUFFICIENT FOOD AND SUPPLIES MUST BE PROVIDED FOR THE OCCUPANTS. THE MINIMUM NECESSITIES ARE:

- WATER — MINIMUM REQUIREMENTS (DEPENDENT UPON TEMPERATURE — LESS IN

COLD WEATHER, MORE IN WARMER) WILL BE FROM ONE QUART TO ONE GALLON PER PERSON PER DAY. STORAGE CAN BE ACCOMPLISHED BY USING DISINFECTED METAL OR PLASTIC TRASH CANS OR BOXES LINED WITH STRONG POLYETHYLENE FILM OR STRONG PLASTIC BAGS. FOR PURITY, EIGHT DROPS (ONE TEASPOON) OF A 5-% CHLORINE SOLUTION (e.g., CLOROX) SHOULD BE MIXED INTO EACH 5 GALLONS OF WATER.

- FOOD — ALL FOOD SHOULD REQUIRE NO REFRIGERATION AND SHOULD BE BROUGHT TO THE SHELTER IN AIRTIGHT TINS OR BOTTLES. UNDER SHELTER CONDITIONS, PEOPLE WILL REQUIRE ABOUT HALF AS MUCH FOOD AS USUAL. FOODS SHOULD HAVE A HIGH NUTRITIONAL VALUE AND A MINIMAL AMOUNT OF BULK (i.e., CANNED MEATS — FRUITS — VEGETABLES, DRIED CEREALS, HARD CANDY, ETC.)

- SANITATION — A METAL CONTAINER WITH A TIGHT-FITTING LID FOR USE AS A TOILET WITH WHICH PLASTIC BAGS CAN BE USED. TOILET PAPER, SOAP, TOWELS, SANITARY ITEMS AND A QUANTITY OF STRONG PLASTIC BAGS WILL BE NEEDED.

- MEDICAL SUPPLIES — A WELL-STOCKED FIRST-AID KIT COMPARABLE TO WHAT IS USUALLY KEPT AT HOME. TAKE SPECIAL MEDICINES FOR INFANTS AND OTHERS AND A GOOD FIRST-AID HANDBOOK.

- CLOTHING AND BEDDING — SEVERAL CHANGES OF CLEAN CLOTHING, ESPECIALLY SOCKS AND UNDERCLOTHING — DEPENDENT UPON THE WEATHER, BLANKETS, PILLOWS AND SLEEPING BAGS MAY ALSO BE NEEDED.

- PORTABLE RADIO — LASTLY, BUT HARDLY LEAST IMPORTANT, A PORTABLE RADIO WITH FRESH AND EXTRA BATTERIES. RADIO STATION BROADCASTS WILL ADVISE YOU WHEN IT IS SAFE TO ABANDON THE SHELTER AND ALSO PROVIDE YOU WITH OTHER IMPORTANT EMERGENCY INFORMATION.


EXPEDIENT FALLOUT SHELTER

CAR-OVER-TRENCH

GENERAL INFORMATION: READ AND STUDY ALL INSTRUCTIONS BEFORE BEGINNING. IF A BIG STATION WAGON IS USED, SHELTER CAN BE PROVIDED FOR UP TO 6 PERSONS, LESS IF CAR IS SMALLER. THIS SHELTER CAN NOT BE BUILT IN AREAS WHERE GROUNDWATER OR ROCK IS CLOSE TO THE GROUND SURFACE. SHELTER CAN BE CONSTRUCTED BY TWO PERSONS WORKING A TOTAL OF ABOUT 8 HOURS EACH.


STEP 1

SELECT A LEVEL SITE. DIG A SMALL TEST HOLE ABOUT 10 INCHES DEEP. REMOVE ALL LOOSE EARTH FROM THE BOTTOM. PUSH THE POINT OF YOUR THUMB INTO THE UNDISTURBED EARTH IN THE BOTTOM OF HOLE. IF YOU CANNOT PUSH YOUR THUMB DEEPER THAN ONE INCH, THE EARTH SHOULD BE SUITABLE FOR THIS SHELTER. IF THUMB PENETRATES DEEPER THAN ONE INCH, MOVE TO ANOTHER SITE AND REPEAT TEST, BECAUSE EARTH AT THE TESTED SITE IS NOT SUITABLE.




STEP 2

STAKE OUT DIMENSIONS SHOWN FOR TRENCH AND ENTRYWAY. NOTE THAT THE LENGTH OF TRENCH MUST BE 4 FEET LESS THAN THE OVERALL LENGTH OF THE CAR.

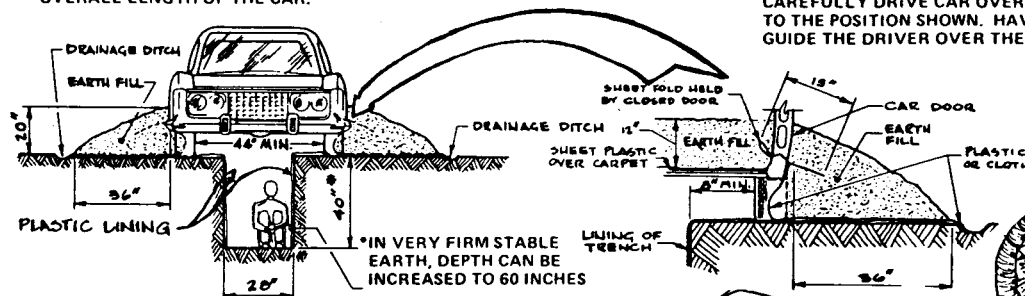

TRENCH AND FILL DETAIL


ALTERNATIVE METHOD FOR SANDY SOILS

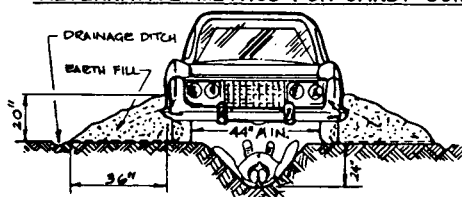

A "SIT IN" SHELTER CANNOT BE DUG IN BEACH TYPE SAND, BECAUSE THE TRENCH WALLS WILL CAVE IN. HOWEVER, A "LIE IN" TRENCH CAN BE DUG AS SHOWN ABOVE AND STILL PROVIDE GOOD FALL-OUT PROTECTION. ALL OTHER STEPS REMAIN THE SAME.

TOOLS AND MATERIALS

1. CAR; CAUTION: CAR MUST HAVE AT LEAST 44 INCHES OF WIDTH BETWEEN INSIDE WALLS OF TIRES.
2. PICK AND LONG-HANDLED SHOVEL.
3. PLASTIC SHEETING AND/OR CLOTH APPROX. 10-12 BEDSHEETS OR EQUIV. AREA OF OTHER MATERIALS WILL BE REQUIRED.
4. SANDBAGS, SACKS OR PILLOWCASES, 9 REQUIRED.
5. 50 FEET OF STRONG STRING OR CORD AND A KNIFE.
6. YARDSTICK OR MEASURING TAPE
7. WORK GLOVES FOR EACH WORKER.
8. STAKES, 4 REQUIRED.




STEP 3

EXCAVATE TRENCH AND ENTRYWAY. AS TRENCH DEEPENS, REPEAT EARTH STABILITY TEST ON BOTTOM OF TRENCH. IF EARTH BECOMES "SOFTER" DO NOT DEEPEN TRENCH. PLACE EXCAVATED EARTH AWAY FROM TRENCH SO THAT CAR CAN BE DRIVEN OVER TRENCH.

STEP 4

LINE TRENCH WITH PLASTIC OR CLOTH. LINING SHOULD TOUCH FLOOR OF TRENCH AND EXTEND OUTWARD TO THE LIMIT OF EARTH FILL. AFTER TRENCH IS LINED, CAREFULLY DRIVE CAR OVER TRENCH TO THE POSITION SHOWN. HAVE SOMEONE GUIDE THE DRIVER OVER THE TRENCH.


- STEP 5** REMOVE ALL SEATS (IF POSSIBLE). COVER FLOOR AND TRUNK WITH PLASTIC; PLACE 1 FOOT OF EARTH FILL IN TRUNK AND ON FLOOR.

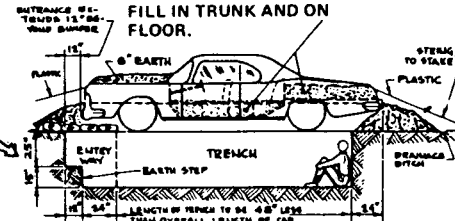

TRENCH AND ENTRYWAY DETAIL

STEP 6

PLACE PLASTIC COVER OVER ENTRANCE AND VENTILATION OPENINGS. SECURE UNDER HOOD AND TRUNK LID.

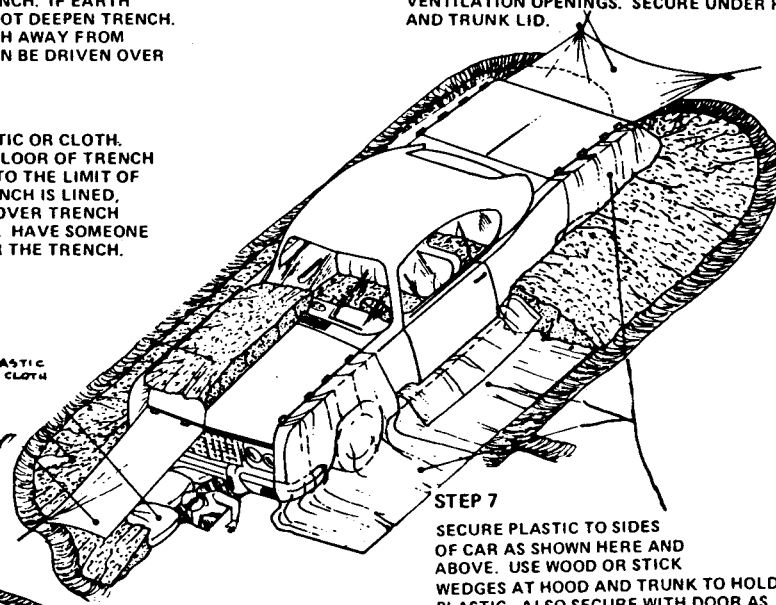

STEP 7

SECURE PLASTIC TO SIDES OF CAR AS SHOWN HERE AND ABOVE. USE WOOD OR STICK WEDGES AT HOOD AND TRUNK TO HOLD PLASTIC. ALSO SECURE WITH DOOR AS SHOWN ABOVE.

STEP 8

BANK EARTH AROUND CAR TO HEIGHT OF 20 INCHES

STEP 9


PLACE SANDBAGS AROUND ENTRANCE AND BANK EARTH AROUND THEM.

STEP 10

PLACE 8 INCHES OF EARTH ON CAR HOOD

STEP 11

DIG SHALLOW DRAINAGE DITCH AROUND FILL.

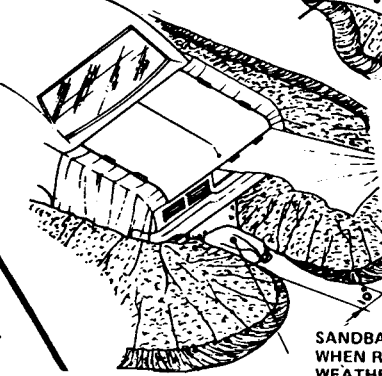

EXPEDIENT FALLOUT SHELTER

TILT-UP DOORS AND EARTH

GENERAL INFORMATION

READ AND STUDY ALL INSTRUCTIONS BEFORE STARTING TO BUILD. THE LOCATION SELECTED FOR THIS SHELTER SHOULD BE LEVEL OR GENTLY SLOPING DOWN AND AWAY FROM THE MASONRY WALL. A THREE-PERSON SHELTER CAN BE CONSTRUCTED BY THREE PEOPLE WORKING A TOTAL OF 6 HOURS EACH.

STEP 1

LAY OUT THE TRENCH AND EARTH NOTCH WIDTHS, AS DIMENSIONED ON THE SECTION BELOW, ADJACENT TO A MASONRY WALL. DETERMINE THE LENGTH OF TRENCH AND NOTCH BY ALLOWING ONE DOOR WIDTH OF LENGTH PER PERSON TO BE SHELTERED.

STEP 2

EXCAVATE TRENCH AND EARTH NOTCH. PLACE EXCAVATED EARTH OUTSIDE SHELTER LIMITS FOR LATER USE.

STEP 3

REMOVE DOOR KNOBS FROM ALL DOORS. PLACE DOUBLE LAYER OF DOORS IN NOTCH AND AGAINST WALL AS SHOWN IN SKETCH. NAIL 1" X 8" BOARD TO DOOR EDGES AT ENTRANCE TO SERVE AS EARTH STOP. AFTER ATTACHING PLASTIC ENTRANCE COVER AS SHOWN, OR BUILD RETAINING WALL OF SANDBAGS IN LIEU OF BOARD. PLACE ONE DOOR ON EDGE LENGTHWISE AS THE END CLOSURE.

STEP 4

PLACE ONE END OF THE ROLLED UP WATERPROOFING MATERIAL UNDER THE TOP EDGE OF THE DOORS BEFORE EARTH FILL IS PLACED. BEGIN PLACEMENT OF EARTH FILL ON DOORS. COVER THE EARTH FILL WITH WATERPROOFING MATERIAL. SECURING IT WITH EARTH AT TOP AND BOTTOM TO PREVENT IT FROM BLOWING AWAY.




STEP 5

CONSTRUCT ENTRANCE - FILL "SANDBAG PILLOWCASES" WITH EARTH TAKEN FROM THE TRENCH AND STACK TO DIMENSIONS SHOWN AFTER DOORS ARE IN PLACE. PLASTIC OR POLYETHYLENE (WATERPROOFING MATERIAL) ENTRANCE COVER SHOULD BE IN PLACE BEFORE EARTH FILL IS PUT ON THE DOORS.

TOOLS AND MATERIALS

1. TOOLS: PICK, SHOVEL, HAMMER, SAW, SCREWDRIVER, KNIFE, YARDSTICK.
2. SANDBAGS PILLOWCASES OR PLASTIC GARBAGE BAGS - AT LEAST 39.
3. LUMBER: 1" X 8" PIECE 7' LONG (OR 20 MORE SANDBAGS) FOR EARTH-FILL STOP AT ENTRANCE EDGE OF DOORS.
4. ROPE OR CORD TO TIE SAND BAGS.
5. DOORS: TWO LAYERS FOR LENGTH OF SHELTER PLUS ONE FOR END CLOSURE. (EXAMPLE: 7 DOORS FOR 3 PERSON SHELTER).
6. NAILS: 8 penny (2 1/2" LONG), ABOUT 10 TO NAIL EARTH STOP TO DOOR EDGES AT ENTRANCE.
7. PLASTIC OR POLYETHYLENE (WATERPROOFING MATERIAL) TO COVER DOUBLE LAYER OF DOORS PLUS ENTRANCE.
8. WORK GLOVES FOR EACH WORKER.

ENTRY DETAIL

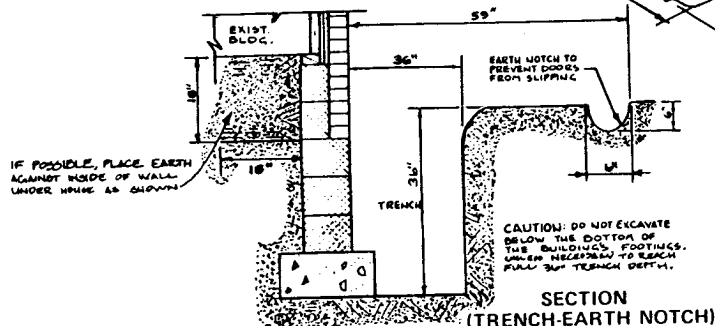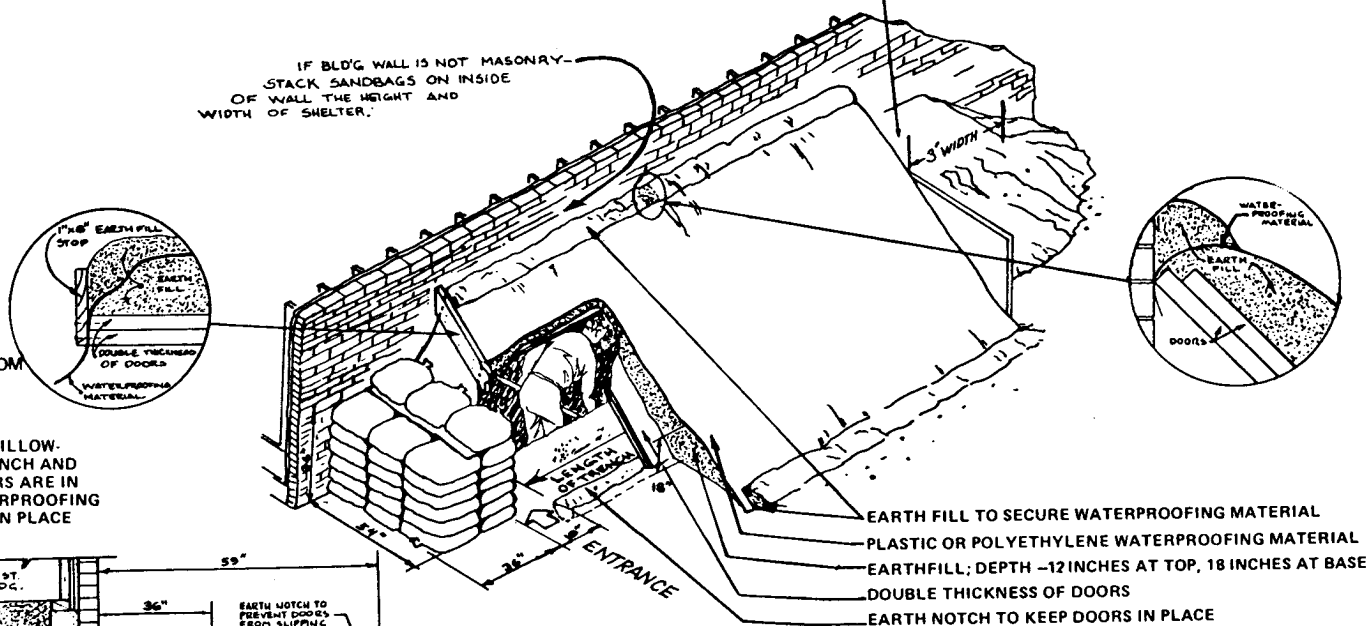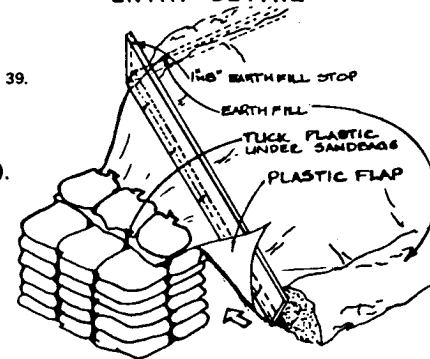

EXPEDIENT FALLOUT SHELTER

ABOVE-GROUND DOOR-COVERED SHELTER

GENERAL INFORMATION


THE ABOVE-GROUND DOOR-COVERED SHELTER IS DESIGNED FOR AREAS WHERE BELOW-GROUND SHELTERS ARE IMPRACTICAL BECAUSE THE GROUNDWATER TABLE OR BEDROCK IS CLOSE TO THE GROUND SURFACE. THIS SHELTER CAN BE BUILT BY FOUR PERSONS WORKING A TOTAL OF 10 HOURS EACH.

READ AND STUDY ALL INSTRUCTIONS BEFORE STARTING TO BUILD. IF DOOR WIDTHS MEASURE LESS THAN 32 INCHES, USE A COMBINATION OF DOORS TO PROVIDE A MINIMUM OF 32 INCHES OF DOOR-WIDTH PER PERSON.

STEP 1

SELECT A SHELTER LOCATION WHERE THERE IS LITTLE OR NO CHANCE OF RAINWATER PONDING ON THE GROUND SURFACE. STAKE OUT SHELTER, REMOVE DOOR KNOBS. ALLOW 1 DOOR FOR EACH PERSON PLUS 1 DOOR FOR ENTRY/EXIT AT END. LIMIT IS 8 PERSONS PER SHELTER.

DOORS (32" WIDE) 1 PER PERSON PLUS 1 FOR ENTRY/EXIT.

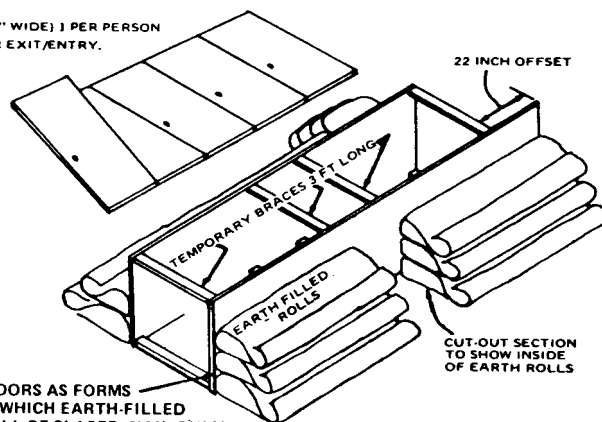

STEP 2


SET UP DOORS AS FORMS AROUND WHICH EARTH-FILLED ROLLS WILL BE PLACED. NAIL ONLY TOP BRACES. NAILS MUST BE REMOVED LATER. BRACE ALL CORNERS, CENTER, TOP AND BOTTOM OF EACH DOOR.

STEP 3

BEGIN TO PLACE EARTH-FILLED ROLLS AGAINST DOOR FORMS. TO FORM EARTH ROLLS, SEE EARTH-FILLED ROLL DETAIL BOTTOM OF PAGE.

EARTH-FILLED ROLL DETAIL

1. PLACE 2 FT OF SHEET ON GROUND AND TEMPORARILY DRAPE REMAINDER OF SHEET ON DOOR
2. PLACE EARTH ON SHEET - SHAPE AS SHOWN.
3. FOLD SHEET OVER SHAPED EARTH.
4. PLACE EARTH ONTO SHEET AT NARROW TRENCH.
5. FOLD SHEET TO FORM EARTH HOOK. HOOK WILL ANCHOR SHEET.
6. REPEAT TO FORM NEXT EARTH-FILLED ROLL.



PROVIDE 4-6" DIA. PIPE FOR VENTILATION

STEP 4

DIG 14" DEEP, 36" WIDE TRENCH INSIDE SHELTER. EARTH CAN BE USED TO FORM SIDE EARTH FILLED ROLLS. TRENCH CAN BE MADE UP TO 3 FEET DEEP IF CONDITIONS PERMIT.

STEP 5

MOUND EARTH AGAINST THE EARTH-FILLED ROLLS AS SHOWN. CONTINUE PLACING EARTH AND SHEETS TO FORM EARTH-FILLED ROLLS.

STEP 6

KEEP HEIGHT OF EARTH ABOUT EQUAL ON BOTH SIDEWALLS AS ROLLS ARE FORMED. AFTER SIDEWALLS HAVE REACHED PLANNED HEIGHT, REMOVE BRACES AND DOOR FORMS, USE SAME DOOR FORMS TO CONSTRUCT ENDWALLS WITH EARTH FILLED ROLLS. PROVIDE EXIT/ENTRY AT END AS SHOWN.

STEP 7


REMOVE DOOR FORMS FROM ENDWALLS. POSITION ROOF DOORS IN THEIR FINAL POSITION. PLACE ENTRY FRAME FOR DOOR OVER ENTRY/EXIT. PLACE WATERPROOFING MATERIAL ON DOORS.

STEP 8


PLACE 15 INCHES OF EARTH ON TOP OF SHELTER. IN HOT WEATHER CONSTRUCT A SHELTER VENTILATION AIR PUMP. SEE AIR PUMP DETAILS ON LAST PAGE.

TOOLS AND MATERIALS

1. Doors as indicated.
2. Pick or Mattock and Shovel.
3. Two Buckets or Large Cans to Carry Earth.
4. Tape Measure, Yardstick or Ruler.
5. Saw, Axe or Hatchet.
6. Hammer and at least 20 Nails - 2 1/2" long.
7. At least 4 Double Bed Sheets for Each Person to be Sheltered.
8. Pillowcases and Rainproofing Materials such as Plastic or Polyethylene.
9. Work Gloves for Each Worker.
10. Lumber for use as Temporary Braces and for Entry/Exit Frame.

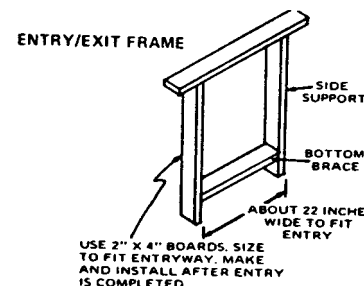


FOLD WATERPROOFING MATERIAL UNDER HIGHER EDGE OF DOOR TO KEEP IT FROM SLIPPING.

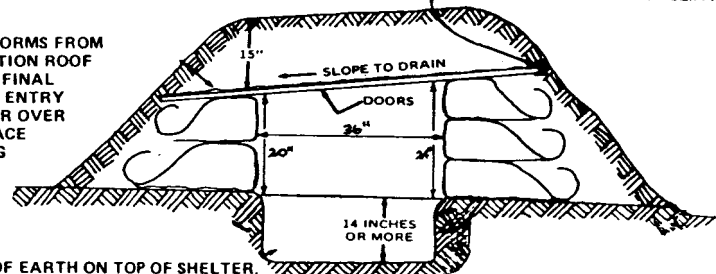

NOTE: IF TRENCHING IS IMPRACTICAL HEIGHTEN WALLS BY USING ADDITIONAL EARTH ROLLS.

PLAN VIEW OF SHELTER (4 PERSON)

(LOOKING DOWN)

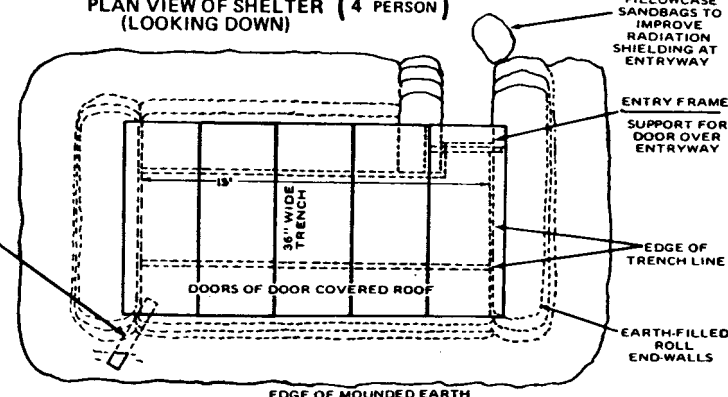

EXPEDIENT FALLOUT SHELTER


LOG-COVERED TRENCH SHELTER

GENERAL INFORMATION

THIS SHELTER IS DESIGNED FOR AREAS WHERE THE DEPTH BELOW THE GROUND SURFACE TO HARD ROCK OR GROUNDWATER IS BELOW THE BOTTOM OF THE TRENCH. ALSO, THE EARTH MUST BE SUFFICIENTLY FIRM AND STABLE SO THAT THE TRENCH SIDEWALLS WILL NOT CAVE IN. IN ADDITION, ADEQUATE SMALL TREES THAT CAN BE CUT FOR LOGS MUST BE AVAILABLE IN THE IMMEDIATE AREA. THE SHELTER (4-PERSON CAPACITY) CAN BE BUILT BY 4 PEOPLE WORKING A TOTAL OF 12 HOURS EACH. AFTER INITIAL COMPLETION, THE SHELTER CAN BE ENLARGED TO A WIDTH OF 5 FT.-6 IN. AND DEEPENED TO 6 FT. HOWEVER, 9-FT LOGS MUST BE USED IN PLACE OF 7-FT LOGS AND THE BURIED ROOF MUST BE LARGE ENOUGH TO COVER THE WIDENED SHELTER DURING THE INITIAL CONSTRUCTION.

STEP 1

CLEAR AREA OF BRUSH AND TALL GRASS.
LAYOUT SHELTER AS SHOWN BELOW.

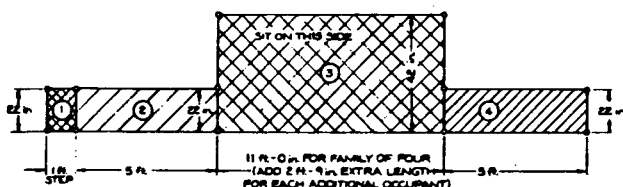

LEGEND:

○ = WOOD OR METAL STAKE




STEP 2

BEGIN EXCAVATING THE TRENCH. PLACE EXCAVATED EARTH AT LEAST 3 FEET BEYOND THE EDGE OF TRENCH SO THAT THE ROOF LOGS CAN LATER BE PLACED OVER THE TRENCH.

STEP 3


AS THE TRENCH EXCAVATION PROGRESSES, SOME WORKERS SHOULD BEGIN CUTTING LOGS TO THE LENGTH AND SIZE AS SHOWN ON THE ILLUSTRATIONS.

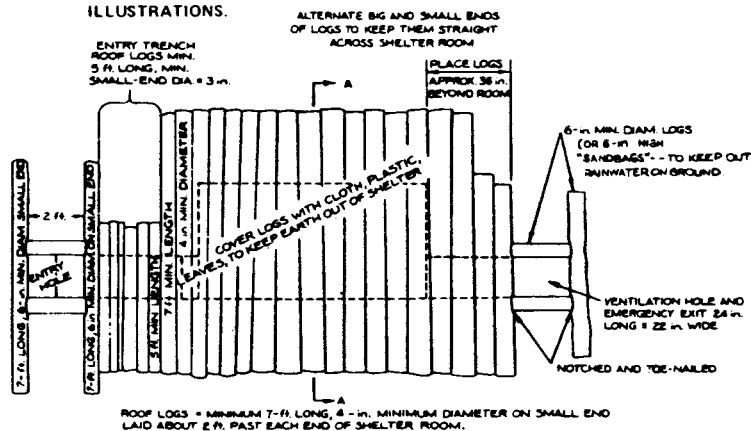

PLAN VIEW OF TOP OF SHELTER

STEP 4


PLACE LOGS OVER TRENCH. POSITION TIES FOR BED SHEET CHAIRS OR HAMMOCKS. PLACE NEWSPAPER OR OTHER MATERIAL AS INDICATED OVER LOGS. PLACE EARTH FILL AND BURIED ROOF.

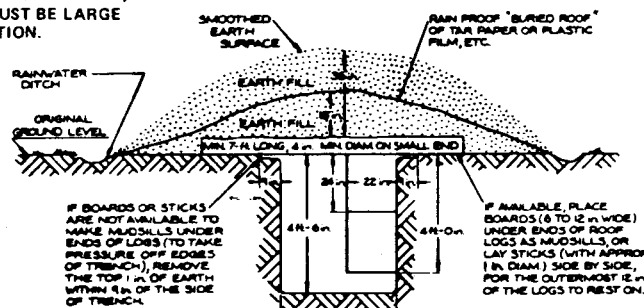

SECTION A-A

STEP 5

CONSTRUCT CANOPIES OVER THE OPENINGS.

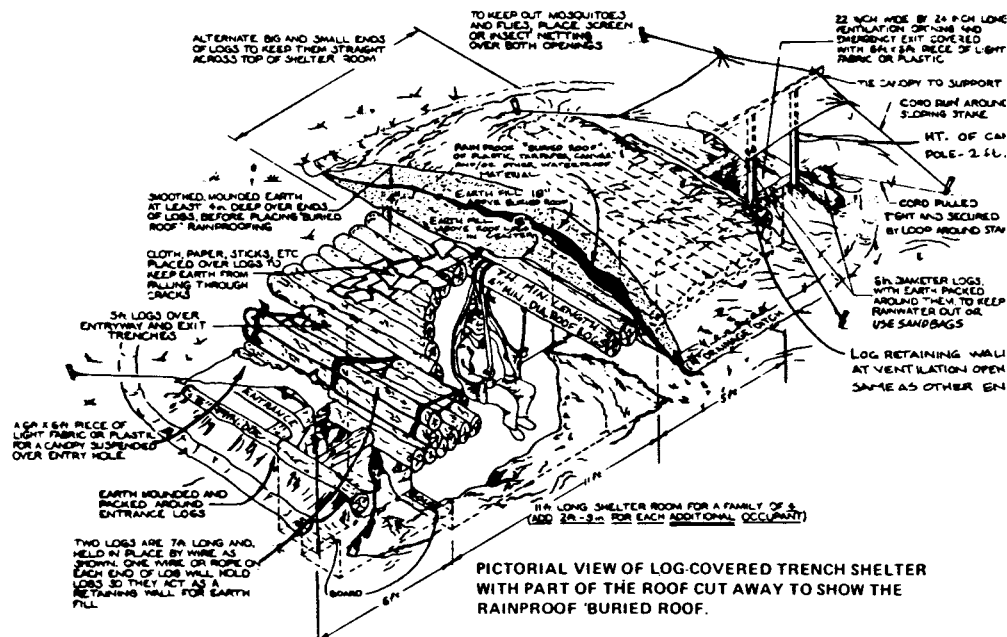

PICTORIAL VIEW OF LOG-COVERED TRENCH SHELTER WITH PART OF THE ROOF CUT AWAY TO SHOW THE RAINPROOF 'BURIED ROOF'.

TOOLS AND MATERIALS

1. SAW AND/OR AXE.
2. PICK OR MATTOCK.
3. LONG-HANDLED SHOVELS.
4. RAINPROOFING MATERIAL (PLASTIC OR POLYETHYLENE) 25 SQUARE YARDS. FOR EACH PERSON ABOVE 4, ADD 2 SQ YDS.
5. 50 FEET OF STRONG STRING OR CORD AND A KNIFE.
6. TAPE MEASURE OR YARD STICK.
7. AT LEAST 8 PILLOW CASES AND/OR SANDBAGS.
8. WORK GLOVES.
9. BED SHEETS FOR USE AS "CHAIRS" OR "HAMMOCKS" - 1 PER PERSON PLUS AT LEAST 15 FEET OF STRONG ROPE OR CORD PER BED SHEET.
10. 15 POUNDS OF NEWSPAPERS TO PLACE OVER ROOF LOGS TO KEEP EARTH FROM FALLING THROUGH CRACKS BETWEEN LOGS.

APPROX. NO. OF POLES REQ'D.

45	-	7' LONG	4" DIA.
10	-	5' "	4" "

EXPEDIENT FALLOUT SHELTER

ABOVE-GROUND RIDGE-POLE


GENERAL INFORMATION

THIS SHELTER IS DESIGNED FOR AREAS WHERE THERE IS AN ABUNDANCE OF SMALL TREES AND BELOWGROUND SHELTERS ARE IMPRACTICAL. THE SHELTER (5-PERSON CAPACITY) CAN BE BUILT BY 5 PEOPLE WORKING A TOTAL OF 18 HOURS EACH. READ AND STUDY ALL INSTRUCTIONS BEFORE BEGINNING.

5-PERSON SHELTER IS ILLUSTRATED - FOR EACH PERSON ABOVE 5, MAKE RIDGE POLE 1 FT. LONGER; FOR 6 TO 8 PERSONS, USE 3 COLUMN POSTS - 10 TO 14 PERSONS, USE 4 COLUMNS.

STEP 1


CONSTRUCT RIDGE POLE FRAME

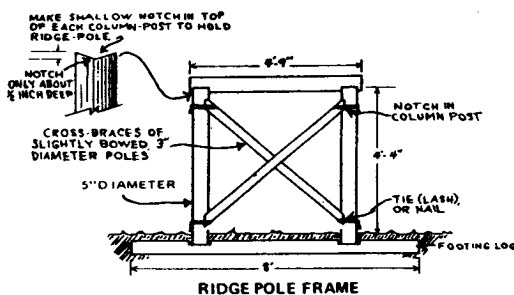

SIDE VIEW SHOWING CROSS-BRACES OF COLUMN POSTS (IF LARGE NAILS ARE AVAILABLE, SIMPLY NAIL TWO SIMILARLY SLOPING CROSS-BRACES ON OPPOSITE SIDES OF THE COLUMN POSTS.) FOR SHELTERS WITH THREE OR MORE COLUMN POSTS USE ONLY ONE BRACE BETWEEN EACH PAIR OF POSTS AND SLOPE BRACES ALTERNATELY IN DIFFERENT DIRECTION.

STEP 2

DIG 4" DEEP "V" TRENCH IN EARTH AND PLACE 9' ROOF POLES IN TRENCH AND ON RIDGE-POLE FRAME AS SHOWN.

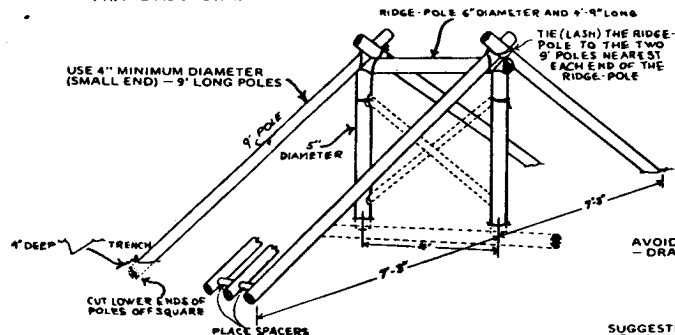

TOOLS AND MATERIALS

1. SAW TO CUT GREEN POLES (BOW OR CROSSCUT SAW PREFERRED), AND AN AXE.
2. SHOVEL (ONE SHOVEL FOR EACH TWO WORKERS).
3. LARGE BUCKETS, CANS, OR POTS WITH BAIL HANDLES TO CARRY EARTH.
4. KNIFE.
5. THREE DOUBLE-BED SHEETS FOR THE ILLUSTRATED 5-PERSON SHELTER, OR AN EQUIVALENT AREA OF EQUALLY STRONG FABRIC OR PLASTIC. ONE ADDITIONAL SHEET FOR EACH ADDITIONAL 2 OCCUPANTS. IF NOT AVAILABLE, USE STICKS AND SMALL POLES PLACED ACROSS THE 9'-FT SIDE POLES AND COVER WITH GRASS OR LEAVES TO FILL IN THE SPACES BETWEEN THE POLES.
6. HAMMER AND AT LEAST 80 NAILS (3 IN. OR LONGER), OR AT LEAST 200 FT. OF ROPE OR STRONG WIRE, OR TWO ADDITIONAL BED SHEETS (OR OTHER FABRIC EQUALLY STRONG) FOR EACH PERSON TO BE SHELTERED TO MAKE INTO FOOT-WIDE STRIPS TO SERVE AS "ROPE" WHEN TWISTED.
7. AT LEAST 2 SQUARE YARDS PER PERSON OF RAIN-PROOFING MATERIAL (SHOWER CURTAINS, PLASTIC TABLE CLOTHS, PLASTIC MATRESS COVERS, ETC.) - ESSENTIAL IN RAINY COLD WEATHER.
8. GLOVES TO PREVENT INJURY AND BLISTERS TO HANDS.

APPROX. NUMBER OF POLES REQ'D.

20 POLES	9' LONG	x 4" DIA.
1	4'9"	x 6"
2	4'4"	x 5"
2	14'	x 4"
2	6'	x 3"
1	8'	x 6"

SHELTER SIDES

40 POLES	3'-4'6"	x 2 1/2"
24	1'-4'6"	x 2 1/2"
120	2'-6"	x 3"

ENTRY

4	8'	x 2 1/2"
13	20"	x 2 1/2"
48	32"	x 2 1/2"
64	36"	x 2 1/2"


ROOF SIDES

PROVIDE VENT OPENING AT END OF RIDGE OR USE 4" MIN. PIPE VENT

3" DIA. SLOPING POLES WITH LOWER ENDS IN "V" TRENCH 4" DEEP

STEP 3


CONSTRUCT ENTRYWAY

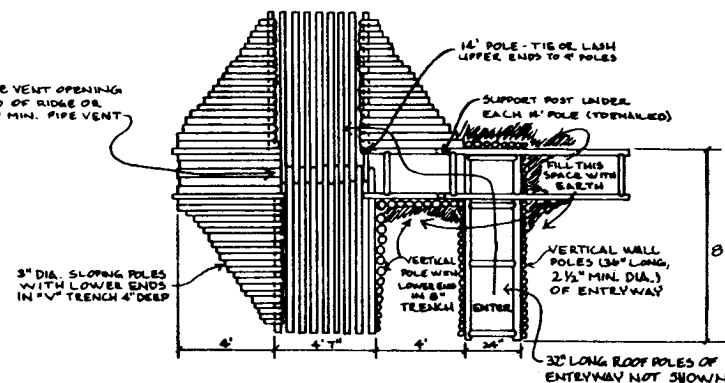

VIEW LOOKING DOWN ON SHELTER WITH ALL POLES IN PLACE EXCEPT THE ROOF POLES OF THE ENTRYWAY

STEP 4

PLACE LIMBS OR STICKS AND BEDSHEETS ACROSS ROOF POLES. PLACE EARTH FILL AND WATERPROOFING MATERIALS AS ILLUSTRATED.

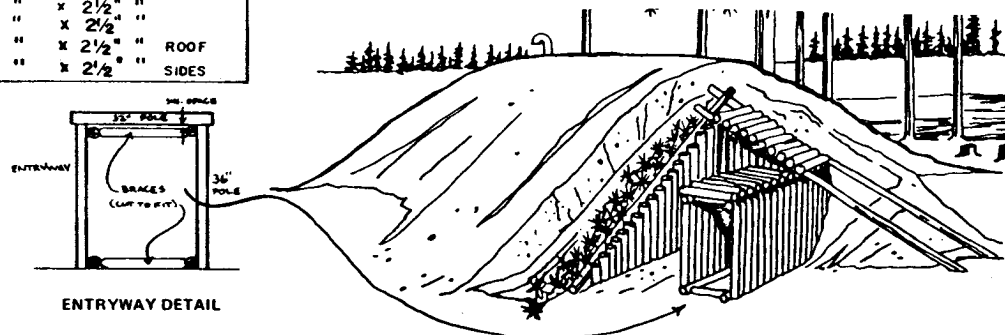

SECTION THRU COMPLETED SHELTER

EXPEDIENT FALLOUT SHELTER

CRIB-WALLED SHELTER (ABOVE GROUND)


GENERAL INFORMATION

THIS SHELTER CAN BE CONSTRUCTED IN AREAS WHERE THERE IS AN ABUNDANCE OF SMALL TREES. THE APPROXIMATE AMOUNT OF TIME AND EFFORT REQUIRED TO BUILD THIS SHELTER (CAP. FOR 5) IS 5 PERSONS WORKING A TOTAL OF 18 HOURS EACH. READ AND STUDY ALL INSTRUCTIONS BEFORE STARTING TO BUILD.

TOOLS & MATERIALS (FOR 5-PERSON CAPACITY)



1. SAW AND/OR AXE TO CUT TREE POLES.
2. SHOVELS (ONE FOR EACH TWO WORKERS).
3. LARGE CANS, BUCKETS AND/OR POTS WITH BAIL HANDLES TO CARRY EARTH.
4. KNIFE OR SCISSORS.
5. AT LEAST 300 FT. OF STRONG WIRE OR 300 FT. OF ROPE, OR 8 DOUBLE-BED SHEETS (TO TEAR INTO 1-FOOT-WIDE STRIPS, TO SERVE AS ROPE WHEN SLIGHTLY TWISTED). FOR EACH ADDITIONAL PERSON ABOVE 5, 20 FT. OF ROPE, OR HALF A DOUBLE-BED SHEET IS NEEDED.
6. AT LEAST 30 SQUARE YARDS, PLUS 2 SQUARE YARDS PER PERSON ABOVE 5, OF RAINPROOF ROOF MATERIALS (SHOWER CURTAINS, PLASTIC TABLE CLOTHS, PLASTIC MATTRESS COVERS, ETC.).
7. 15 DOUBLE-BED SHEETS FOR AN EQUAL AREA OF CLOTH OR PLASTIC AT LEAST AS STRONG AS BED SHEETS. 2 ADDITIONAL SHEETS PER PERSON ABOVE 5.
8. GLOVES TO PROTECT HANDS FROM INJURY AND BLISTERS, FOR EACH WORKER.
9. 15 POUNDS OF NEWSPAPER FOR ROOF COVER.

FLOOR PLAN

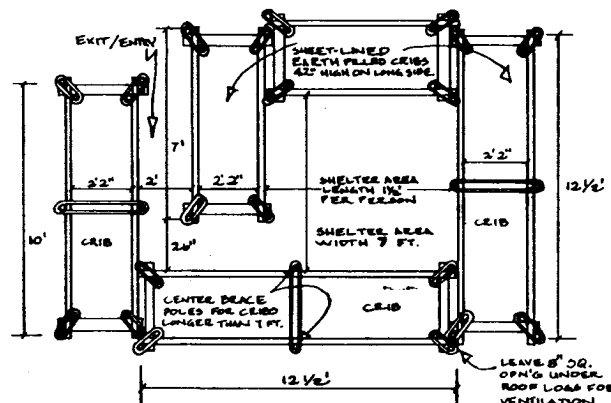

APPROX. NUMBER OF POLES REQ'D.

POLES	12'6" LONG	x	3" DIAMETER	
28	10'	x	3"	
14	9'	x	4"	
20	5'	x	4"	
10	7'	x	3"	
28	42"	x	3"	
60	42"	x	2 1/2"	"CORNER BRACES"
46				

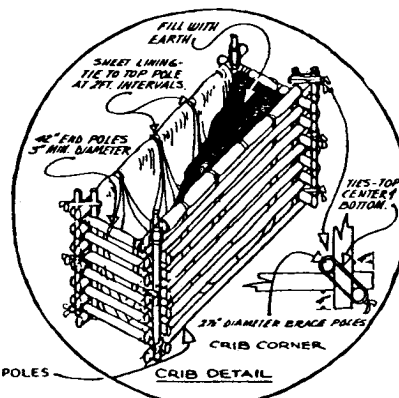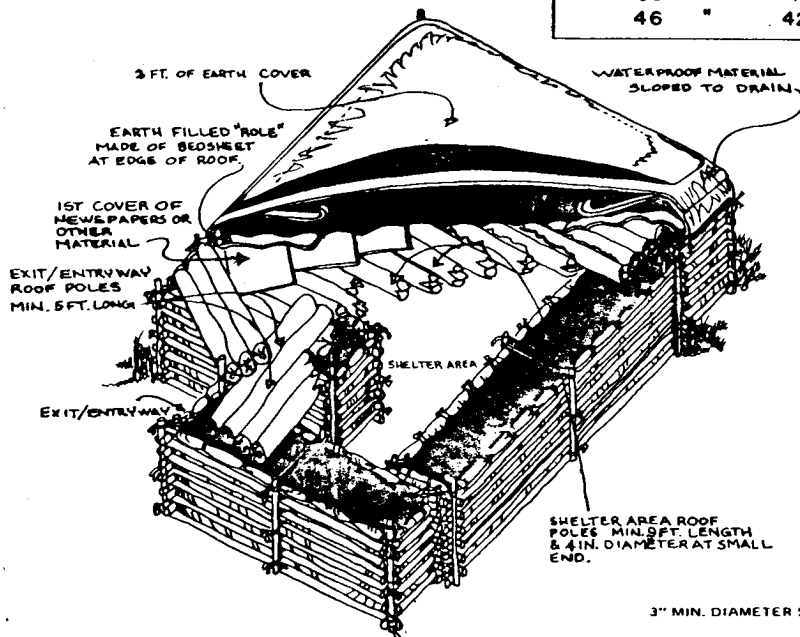

STEP 1

SELECT A SHELTER LOCATION WHERE THERE IS LITTLE OR NO CHANCE OF THE GROUND BEING COVERED WITH WATER IF IT RAINS HARD. STAKE OUT THE ENTIRE SHELTER, LOCATING THE 5 REQUIRED CRIBS.

STEP 2

CUT POLES HAVING TOPS WITH DIAMETERS (NOT INCLUDING BARK) NO SMALLER THAN THE DIAMETERS SPECIFIED ON THE ILLUSTRATION FOR EACH TYPE POLE.

STEP 3

SORT THE POLES BY SIZE (LENGTH AND DIAMETER) AND LAY ALL POLES OF EACH SIZE TOGETHER NEAR THE SHELTER SITE. CUT OFF ALL LIMBS SO THAT POLES ARE SMOOTH. DETERMINE IF ENOUGH LONG-SINGLE POLES CAN BE OBTAINED FOR THE SIDE-POLES OF THE 2 CRIBS ON THE LONG SIDES OF THE SHELTER. USUALLY, IF THE SHELTER IS TO BE BUILT FOR MORE THAN 7 PERSONS (15 3/4-FOOT POLES REQUIRED), IT IS BETTER TO USE 2 CRIBS PLACED END-TO-END INSTEAD OF ONE CRIB THAT REQUIRES THE LONGER POLES.

STEP 4

- PLACE TWO SIDE-POLES ON THE GROUND AND PUT 2 OF THE 3 1/4 FT. END-POLES ON TOP OF THE SIDE POLES SO THAT THE ENDS OF ALL 4 POLES STICK OUT 4" BEYOND WHERE THEY CROSS.
- STACK PAIRS OF END-POLES AND SIDE-POLES TO MAKE THE CRIB (WHILE KEEPING THE CRIB VERTICAL) TO A HEIGHT OF 42". TO KEEP THE TOP POLES OF THE CRIB LEVEL, ALTERNATE THE DIRECTION OF THE BIG AND SMALL ENDS OF THE POLES.
- PLACE A PAIR OF VERTICAL CORNER BRACE-POLES IN EACH OF THE 4 CORNERS OF THE CRIB. BRACE-POLES SHOULD BE CUT OFF AT THE SAME HEIGHT AS THE UPPER SIDES OF THE UPPER-MOST HORIZONTAL POLES TO WHICH THEY WILL BE TIED.
- TIE THE PAIR OF BRACE-POLES TOGETHER (AT BOTTOM, MIDDLE, AND TOP) USING 3-FT. LENGTHS OF WIRE, ROPE, OR TWISTED 1-FT-WIDE STRIPS OF CLOTH.
- IF THE CRIB IS MORE THAN 7 FT. LONG, PLACE A PAIR OF CENTER BRACE-POLES IN POSITION AGAINST THE OUTSIDE OF EACH LONG CRIB. TIE THE PAIR OF BRACE-POLES IN POSITION, ONE AGAINST THE OUTSIDE OF EACH LONG CRIB. TIE THE PAIR OF BRACE-POLES TOGETHER PERMANENTLY, JUST ABOVE THE GROUND. TEMPORARILY TIE EACH OF THEM TO THE UPPERMOST SIDE-POLE.
- LINE THE CRIB WITH CLOTH (OR PLASTIC FILM), MAKING SURE AT LEAST A FEW INCHES OF LINING HANGS OVER THE UPPERMOST POLES. TIE THE UPPER EDGE OF THE LINING TO THE UPPERMOST WALL-POLE EVERY 2 FT., AFTER FIRST CUTTING A SMALL HOLE THROUGH WHICH TO THREAD THE TIE-STRING OR A 4"-WIDE TIE-STRIP OF CLOTH.
- PERMANENTLY TIE TOGETHER THE CENTER BRACE-POLES USING HORIZONTAL TIES AT CENTER AND TOP.
- FILL THE LINED CRIB WITH EARTH FROM WHICH ALL GRASS, ROOTS, ETC., HAVE BEEN REMOVED.

STEP 5

PUT THE 9-FT. ROOF-POLES IN PLACE. PLACE THE STRONGEST POLES AT THE ENTRYWAY, THEN PLACE THE SHORTER (5 TO 6 FT) POLES OVER THE ENTRYWAY.

STEP 6


TO KEEP EARTH FROM FALLING BETWEEN THE CRACKS OF THE ROOF, PUT STICKS IN THE LARGER CRACKS AND COVER THE ROOF WITH TWO OR MORE THICKNESSES OF NEWSPAPER OR OTHER MATERIAL.

STEP 7

PUT EARTH COVER ON THE ROOF TO THE DEPTHS SHOWN ON THE ILLUSTRATIONS. BE SURE TO SLOPE THE MOUNDED EARTH SURFACE DOWNWARD TOWARD THE EDGES SO THE ROOF WILL SHED WATER. USE BEDSHEETS TO FORM "EARTH ROLLS" AT THE ROOF EDGE. THE SHEETS WILL SERVE AS FORMS TO HOLD EARTH IN PLACE. CLUMPS OF TURF CAN BE SUBSTITUTED AT ROOF EDGES FOR THE BEDSHEETS. PLACE THE WATER PROOFING MATERIAL BEFORE PLACING THE FINAL 6 INCHES OF EARTH COVER.


STEP 8

IF THE WEATHER IS HOT, BUILD AND INSTALL A SHELTER VENTILATING PUMP. SEE SEPARATE INSTRUCTIONS ON VENTILATION FOR EXPEDIENT SHELTERS.

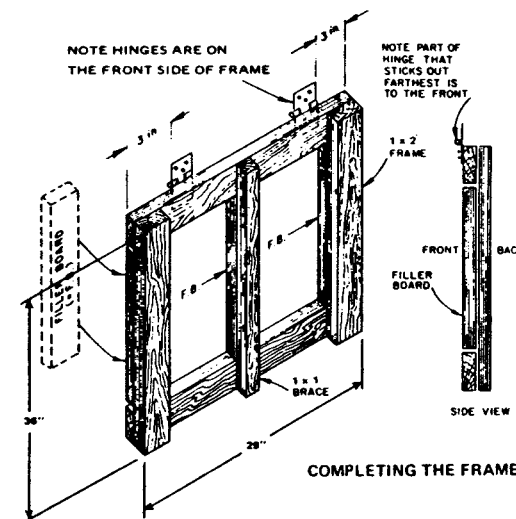


HOW TO CONSTRUCT THE AIR PUMP (CONT'D)

- C. CUT 10 RECTANGULAR STRIPS 30" LONG BY 5 1/2" WIDE FOR USE AS FLAPS. HEM FLAPS AS SHOWN. USE PRESSURE-SENSITIVE TAPE OR SEW HEM SHUT TO FORM HEM TUNNEL.

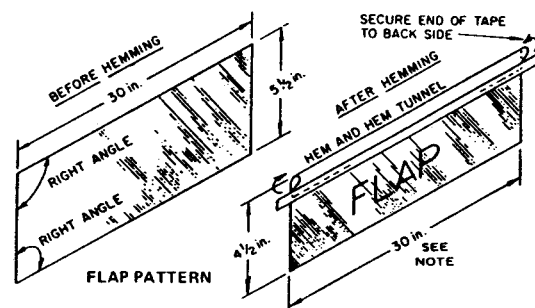


NOTE: WIDTH OF FRAME PLUS 1 INCH


- INSERT 10 PIECES OF STRAIGHT WIRE (PIVOT WIRES) INTO FLAP HEM AS SHOWN. FLAPS SHOULD SWING FREELY. STRING CAN BE USED IF WIRE NOT AVAILABLE (WIRE COAT-HANGER THICKNESS).

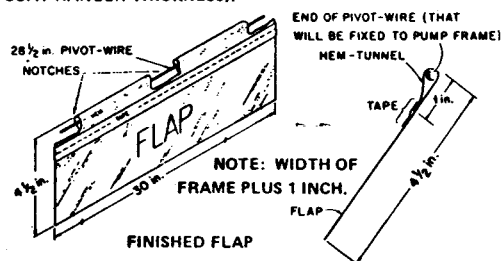


- E. ATTACH FLAP STOPS (STRINGS OR WIRES) TO THE PUMP FRAME AT THE MARKED LOCATIONS. 4 FLAP STOPS ARE NEEDED BETWEEN ADJACENT PIVOT WIRES

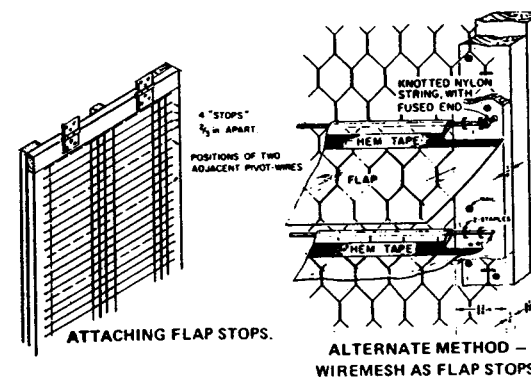

- AFTER HEM IS MADE, CUT NOTCHES IN FLAPS AS SHOWN. AVOID CUTTING TAPE THAT HOLDS HEM.

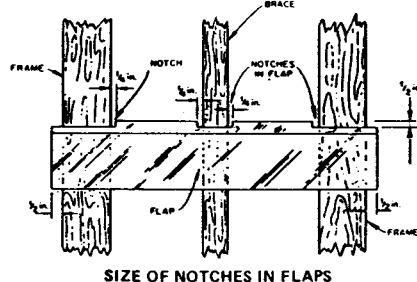


- D. MARK PUMP FRAME FOR PIVOT WIRE AND FLAP STOP LOCATIONS.

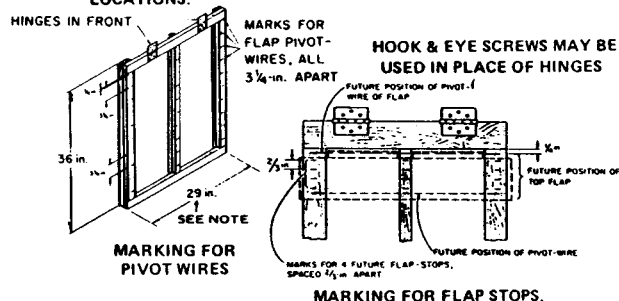

NOTE: FRAME DIMENSIONS MAY HAVE TO BE ADJUSTED TO FIT OPENING IN SHELTER

- F. STARTING FROM THE BOTTOM - STAPLE, NAIL, TACK OR TIE THE FLAP PIVOT-WIRES WITH FLAPS IN THEIR MARKED POSITIONS. ATTACH HINGES TO HORIZONTAL SUPPORT BOARD. ATTACH PULLCORD TO CENTER BRACE.

STEP 4. TYPICAL INSTALLATION OF AIR PUMP

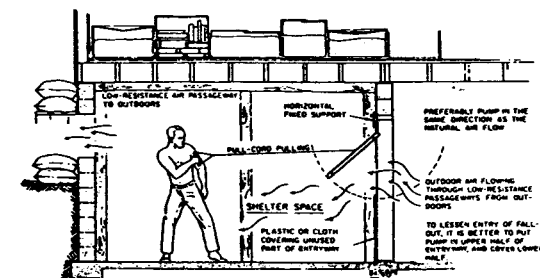

BUCKET STOVE


THIS COMBINATION COOK-STOVE/SPACE HEATER IS MADE USING A 10 TO 16 qt. METAL PA, SOME COAT-HANGER WIRE, AND METAL CUT FROM A LARGE JUICE OR VEGETABLE CAN. WHEN ASSEMBLED AS SHOWN, THE STOVE WILL BRING 3 qts. OF WATER TO A BOIL USING AS FUEL ABOUT 1/2 lb. OF DRY, TWISTED PAPER OR DRY WOOD. PIECES OF WOOD ABOUT 1/2 x 3/4 x 6 INCHES ARE BEST.

NOTE:
LOCATE COOK-STOVE ONLY WHERE EITHER NATURAL OR FORCED VENTILATION IS CAUSING AIR TO LEAVE THE SHELTER—DO NOT OPERATE IN A SEALED SHELTER.

CUT THE DAMPER FROM A JUICE CAN. BEND THE SIDES WITH PLIERS AROUND COAT-HANGER WIRE USED TO ATTACH DAMPER TO PAIL. THIS ALLOWS IT TO MOVE UP AND DOWN.

USING A COLD CHISEL AND TIN SNIPS, CUT A 5x5 SQUARE HOLE IN THE PAIL. WHEN USING COLD CHISEL, PLACE PAIL OVER THE END OF A LOG TO AVOID CRUSHING THE PAIL.

USE 4 OR 5 METAL COAT HANGERS TO FASHION A GRATE AS SHOWN

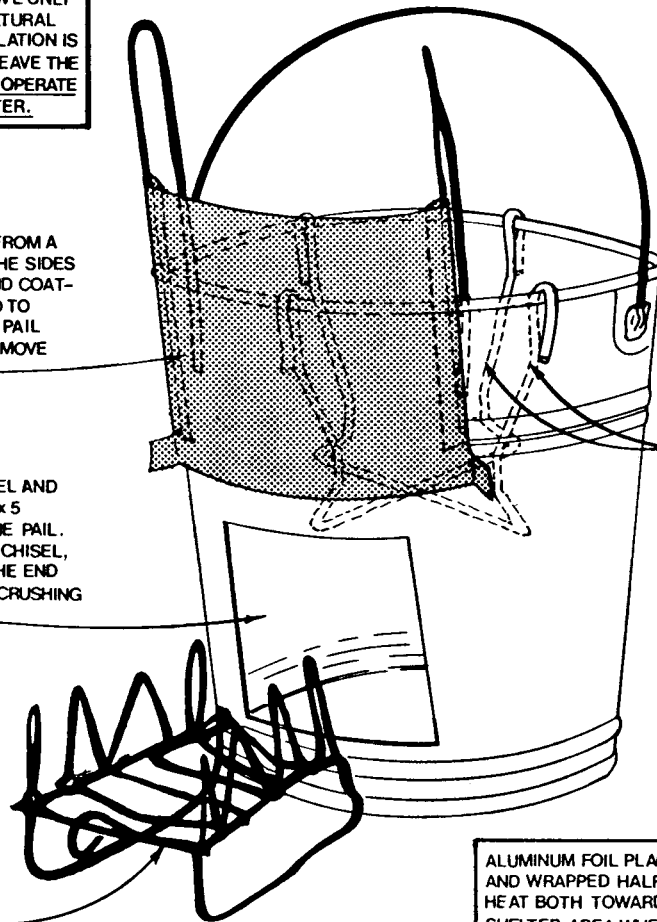


TWO COAT HANGERS USED TO FORM COOK-POT SUPPORT. BEND AS SHOWN TO PRESS FIRMLY AGAINST SIDES OF BUCKET.

ALUMINUM FOIL PLACED IN BOTTOM OF PAIL AND WRAPPED HALFWAY AROUND IT REFLECTS HEAT BOTH TOWARD COOK-POT AND TOWARD SHELTER AREA WHEN DEVICE IS USED AS A SPACE HEATER.

EMERGENCY LAMP

THIS TYPE OF LAMP WILL PROVIDE LIGHT FOR USE IN EXPEDIENT SHELTERS — THE LAMP WILL BURN SLOWLY CONSUMING ABOUT 3 OUNCES OF COOKING OIL IN 24 HOURS.

WARNING
DO NOT USE KEROSENE, DIESEL FUEL, OR GASOLINE — USE ONLY OILS OF THE KIND FOUND IN THE KITCHEN.

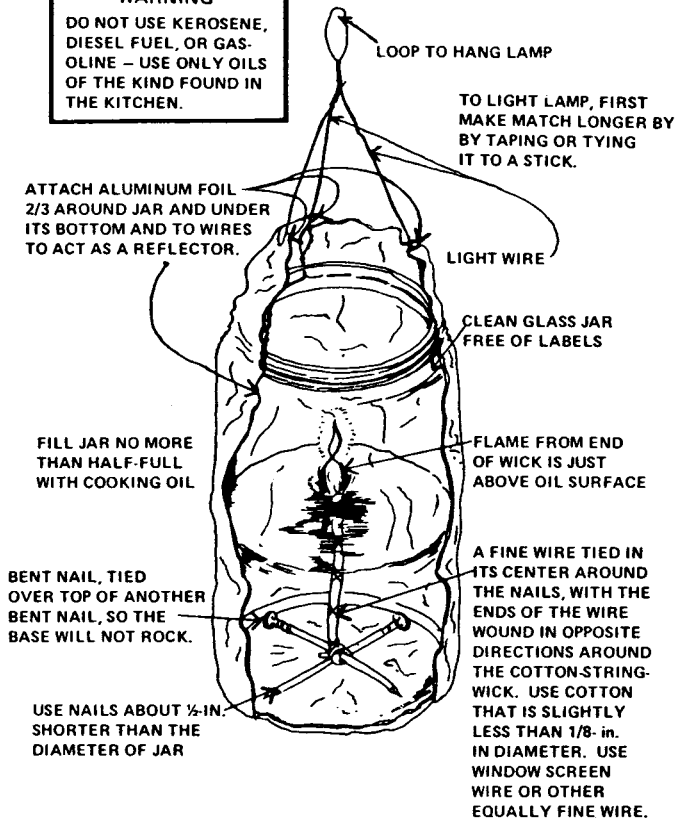

ATTACH ALUMINUM FOIL 2/3 AROUND JAR AND UNDER ITS BOTTOM AND TO WIRES TO ACT AS A REFLECTOR.

FILL JAR NO MORE THAN HALF-FULL WITH COOKING OIL

BENT NAIL, TIED OVER TOP OF ANOTHER BENT NAIL, SO THE BASE WILL NOT ROCK.

USE NAILS ABOUT 1/2-IN. SHORTER THAN THE DIAMETER OF JAR

LOOP TO HANG LAMP

TO LIGHT LAMP, FIRST MAKE MATCH LONGER BY TAPING OR TYING IT TO A STICK.

LIGHT WIRE

CLEAN GLASS JAR FREE OF LABELS

FLAME FROM END OF WICK IS JUST ABOVE OIL SURFACE

A FINE WIRE TIED IN ITS CENTER AROUND THE NAILS, WITH THE ENDS OF THE WIRE WOUND IN OPPOSITE DIRECTIONS AROUND THE COTTON-STRING-WICK. USE COTTON THAT IS SLIGHTLY LESS THAN 1/8-in. IN DIAMETER. USE WINDOW SCREEN WIRE OR OTHER EQUALLY FINE WIRE.

WIRE-STIFFENED-WICK LAMP

KEEP EXTRA WIRE AND WICK-STRING IN SHELTER.